



Cylinder Operated General Purpose 1/4", 3/8", 1/2" 3/2 Way

General Description

GC Cylinder operated 3/2 way valves are recommended for applications where high flow is required. They can be used in control and automation systems at vacuum or pressure. Typical applications are irrigation and industrial air, water, and vacuum systems.

Notes

- Minimum pilot pressure 3 bar.
- See graph of pilot pressure vs. line pressure.
- To order valves manufactured to your specific requirements, please contact our technical sales department.

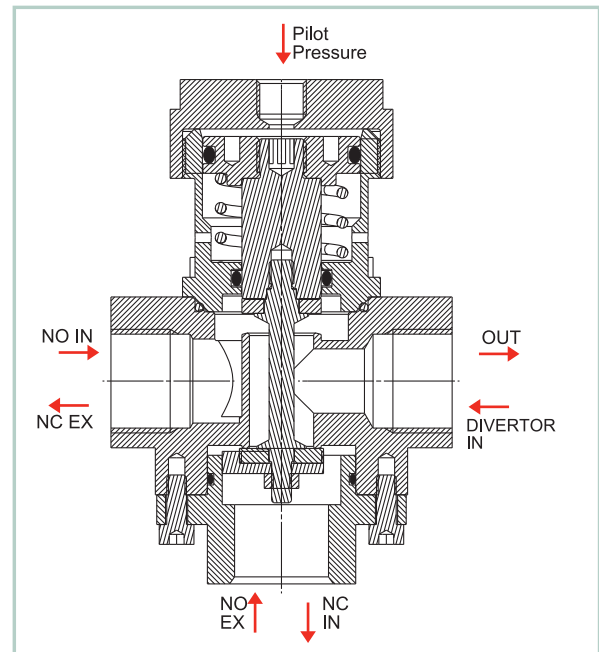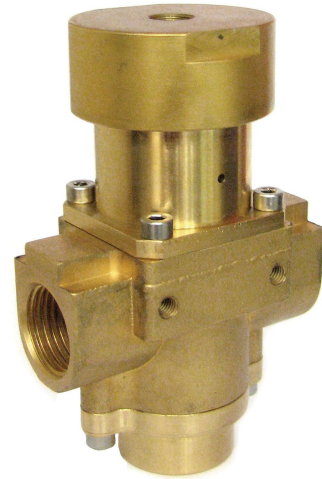

How to Order

Example : GC-2209N

Is a GC cylinder with brass body, 1/4" BSP 3W with NBR seals.

GC	Body	Port	Function	Seals	
	Brass	2	General Purpose	9	
		1/4" BSP		NBR	N
		1/4" NPT		Viton	V
		3/8" BSP		EPDM	E
		3/8" NPT			
		1/2" BSP			
		1/2" NPT			