



VDMA / VDMF

VACUUM SWITCH

Electrical:

5 A 12/24 VDC—125VAC

4 A 250 VAC

(Gold contacts may be required
For less than **12 VDC & 20ma**)

Protection:

DIN 43650-IP65

FL IP67 Sub to termination

Temperature Range:

-25C to +85 C

Mechanical Life:

1,000,000 Plus Cycles

Diaphragm Materials:

Nitrile (Optional Viton or EPDM)

Housing Material:


Brass or Stainless Steel

Max overpressure:

350 PSI (25 BAR)

Weight:

0.25 lbs (0.15 kg)

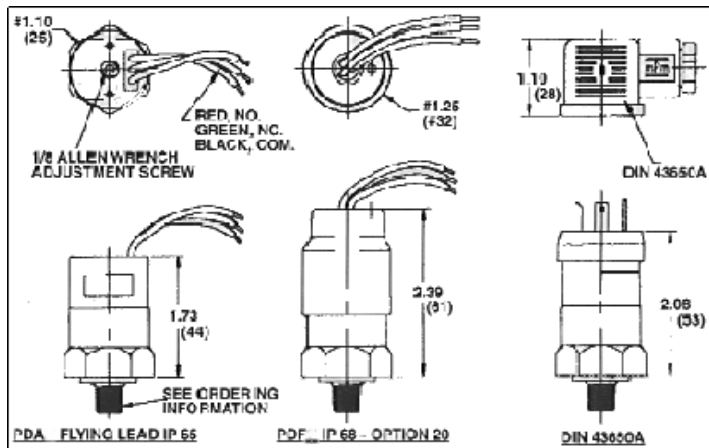

Range	Adjustment
1	5— 28" HG (1.60—850 MILLI BAR)

How to Order:

VDMA—	2—	4G—	C—	HC—
-------	----	-----	----	-----

<p>VDMA (Adjustment range above or factory set point)</p> <p>VDMF Factory set</p>	<p>4G 1/4" Bsp</p> <p>2G 1/8" Bsp</p> <p>4M 1/4" Npt</p> <p>2M 1/8" Npt</p>	<p>C— SPDT</p> <p>A N.O.</p> <p>B N.C.</p>	<p>HC—Din Plug</p> <p>FL Flying Leads</p>	<p>Options</p> <p>Blank Standard</p> <p>1. Viton</p> <p>2. EPDM</p> <p>3. St St</p> <p>7. Gold Contacts</p>
---	---	---	---	---

Other options by request

