

GEVA 75 Irrigation Window Controllers



General Description

Stand-alone battery driven irrigation controller timer with a G75 2WNC 9VDC latch coil connected. Powered by a single 9V battery. Can operate any valve equipped with 3/4" UNEF solenoid cavity (Richdel type).




G75 Window

Notes

- Dust and water tight.
- Various mounting options, on valve and wall.
- High quality alkaline battery included.
- Three automatic irrigation controllers, plus manual operation.
- Please consult our technical sales department for further information on compatibility with various coils.

Options:

- Solar Panel

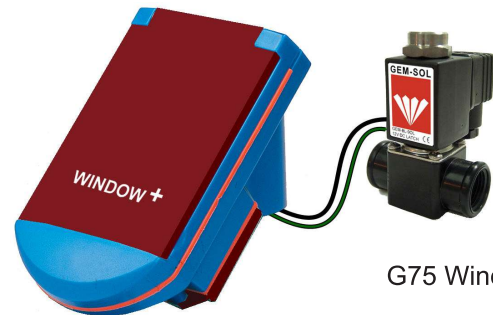

G75 Window+

How to Order Table: G75 Window

Example : G75-C-1W-50

Is a Geva 75 Window controller with 3/4" BSP valve.

G75-C-1W	Valve	
	No valve	00
	3/4" BSP	50
	1" BSP	60
	1" NPT	61
	1-1/2" BSP	70
	1-1/2" NPT	71
	2" BSP	80
	2" NPT	81
	G75-A *	

This controller will only operate with G75 operators.

How to Order Table: G75 Window+

Example : G75-C-1W+-GEM-A-21045N0

Is a Geva 75 Window+ controller with :

GEM-A brass valve, 1/8" BSP, 3WNO, 2.4 orifice, NBR, no manual override.

G75-C-1W+	Valve	
	Refer to How to Order Section of GEM-SOL valves.	
	Consult with us to discuss your specific requirements.	

* G75-A

Type	Port	Function	Manual Override	Orifice
with flange 1	1/8" BSP	2WNC 1	- 0	1 1
without flange 2	1/4" BSP (1)	3WNC 3		1.2 2
Brass 3	1/8" NPT	3WNO 4		1.6 3
	1/4" NPT (1)			

(1) BRASS only