



# FMV

Flow Meter with Flow adjustment valve

**FMV :**

Precision machined acrylic  
VA meter

**Accuracy :**

± 4% Full Scale

**Temperature Range :**

+60 C

**Materials:**

Float : 316 St St

Guide Rod: 316 St St

**Seals:** Silicone Rubber



**Body:** Clear Acrylic

**Max Pressure:**

150 PSI (10 BAR)

**Weight:**

Dependant on size

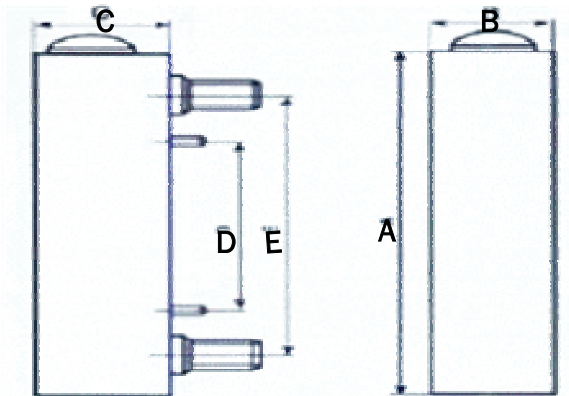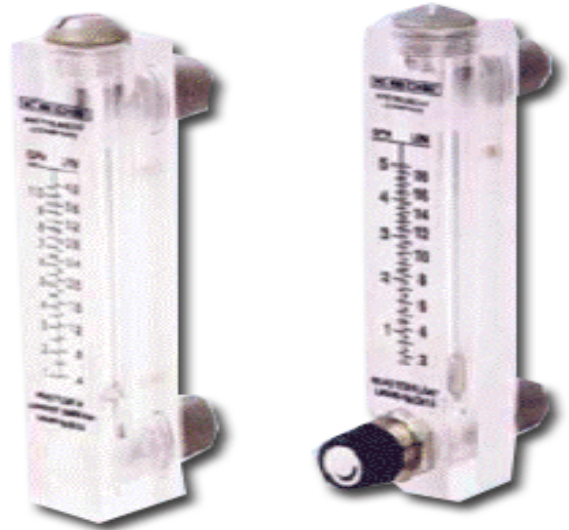

**How to Order:**

FMV 6 – 2–25 L/Hr – 4G

Model	Size (MM)	Range (water 20 deg C)		Dimensions (CM)					
		LPM	LPH	A	B	C	D	E	Thread
FMV6	6		1 - 12	145	30	30		112	1/4" BSP
			2 - 25						
			4 - 40						
FMV6	6		10 - 100	145	30	30		112	1/4" BSP
FMV15	15	1 - 10		168	32	35	76	127	1/2" BSP
		2 - 20							
FMV20	20	5 - 35		220	39	44	100	115	3/4" BSP
		6 - 60							
FMV25	25	10 - 70		226	45	46	100	160	1" BSP
FMV25	25	10 - 100		240	44	50	100	175	1" BSP